



The Clear Choice
Water Filtration Systems

www.aquafilter.com




FCCEL series

Sediment filter cartridge



Aquafilter offers **FCCEL** cartridges (**FCCEL5, FCCEL10, FCCEL20, FCCEL5-L, FCCEL20-L, FCCEL5M10B, FCCEL20M10B, FCCEL5M20B and FCCEL20M20B**) suitable for POU (Point of Use) and POE (Points of Entry) installations. Through its polyester filter media, FCCEL series removes solids in suspension, protecting your water stream and enhancing a continuous supply of fresh and clean drinking water.

SYSTEM CONTENT & SPECIFICATIONS

- Cartridge Media: Polyester
- Cartridge Micron rates (micrometers): FCCEL5, FCCEL5-L, FCCEL5M10B and FCCEL5M20B (5) // FCCEL10 (10) // FCCEL20, FCCEL20-L, FCCEL20M10B and FCCEL20M20B (20)
- Cartridge operating pressure: 6 bar (90 psi)
- Water system temperature range: 2 - 23 °C (35 – 73.4 °F)
- Cartridge material: Polypropylene (end caps)

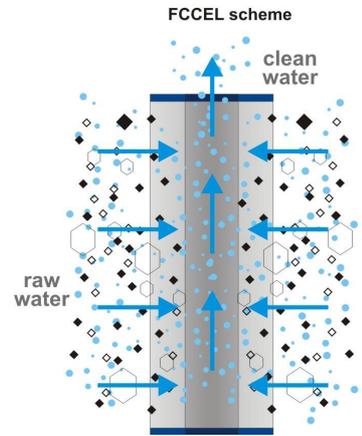

| CAT # | DIMENSION inches (mm) |
|-------------|---------------------------|
| FCCEL5 | 9 7/8 x 2 1/2 (250 x 68) |
| FCCEL10 | 9 7/8 x 2 1/2 (250 x 68) |
| FCCEL20 | 9 7/8 x 2 1/2 (250 x 68) |
| FCCEL5-L | 20 x 2 1/2 (509 x 68) |
| FCCEL20-L | 20 x 2 1/2 (509 x 68) |
| FCCEL5M10B | 9 7/8 x 4 1/2 (250 x 113) |
| FCCEL20M10B | 9 7/8 x 4 1/2 (250 x 113) |
| FCCEL5M20B | 20 x 4 1/2 (509 x 105) |
| FCCEL20M20B | 20 x 4 1/2 (509 x 105) |

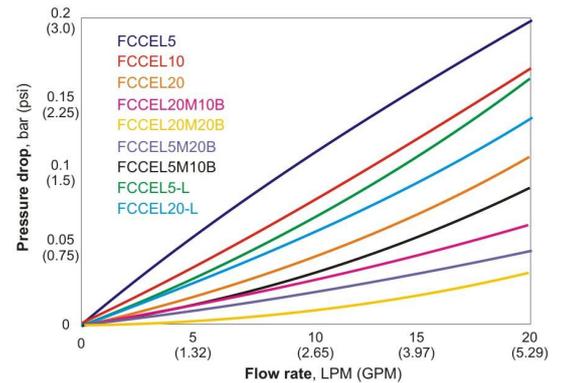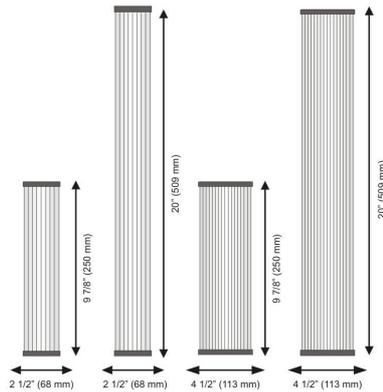

IMPORTANT NOTICE: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection. Release air and flush the filter before use by running cold water through any faucet for 2-5 minutes - new cartridges may release a very fine powder after installation. Proper installation into the housing is necessary for filtration to occur and an arrow on the cartridge indicates the required flow direction. For the product to perform properly we recommend regularly scheduled maintenance and replacement of the filter cartridge. Filters may need to be replaced more frequently than specified based on water consumption and contaminants in your water supply. A decrease in water pressure may indicate that a filter may have become clogged. It is recommended that you keep a "Filter Replacement Log" attached to your system to record the date of filter changes. Beware of purchasing low-cost products from unknown sources as they do not represent our high standards for design, materials or quality. If you choose to purchase and use a look-alike product with a price far below ours it is a clear indication you need to take care regarding safety.

LIMITED WARRANTY: Aquafilter warrants that this product is free from defects in materials and workmanship. This warranty, together with any and all warranties implied by law, shall be limited to a period of time specified on each product warranty card. Improper installation and maintenance may result in property damage. This limited warranty does not apply to failures that result from abuse, misuse, alteration or failure to properly comply with installation or cartridge change instructions. We strongly recommend adding a Pressure Limiting Valve to guard against extreme water pressure at point of use and point of entry to avoid surges and water hammering due to an increase in water pressure. Any damages claimed from failing to install a Pressure Limiting Valve will be denied. All Aquafilter images, trademarks, logos, and other intellectual property are the sole and exclusive property of Aquafilter and may not be used without our express written permission.



Aquafilter Europe
ul. Sw Teresy 101
91-222 Lodz, Poland
sales@aquafilter.com



Made in EU